


Sensor Specification

Measuring Range -40°C to 125°C (-40°F to 257°F)
Sensor Type 10K NTC Thermistor

Sensor Accuracy

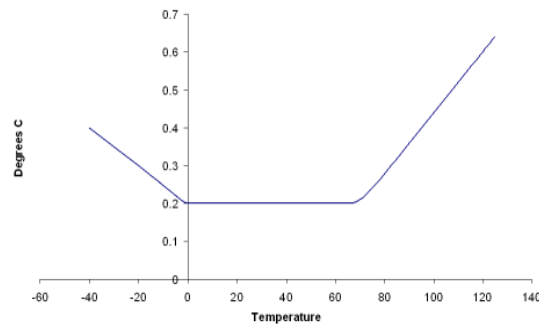

Physical Specification

IP Rating IP67 (waterproof)
Weight 16g

Response Time
Water Better than 10 Seconds (to 90% FSD)

Sensor
Material Epoxy
Temperature rating -40°C to 125°C (-40°F to 257°F)

Cable
Material PVDF
Temperature rating -40°C to 125°C (-40°F to 257°F)

Connector
Material Nickel Plated Brass/Zinc Alloy
Temperature rating -25°C to 85°C (-13°F to 185°F)

Notes

For specialist use, for example applications bringing the product into direct contact with food, we can supply material data sheets so you can assess the suitability of this product for your application.

Calibration

A UKAS traceable certificate of calibration can be supplied for an additional charge at the point of purchase.

Approvals

Gemini Data Loggers (UK) Ltd. operates Quality and Environmental Management Systems which conform to ISO 9001 and ISO 14001. The scope of these systems covers the design, manufacture and servicing of data logging and associated equipment, including software.



Related Products

This probe is suitable for use with the following products:

Tinytag Ultra 2 model numbers:

TGU-4020, TGU-4510

Tinytag Plus 2 model numbers:

TGP-4020, TGP-4510, TGP-4520

Tinytag View 2 model numbers:

TV-4020, TV-4510