

PCL-841 PCM-3680

Dual-port Isolated CAN-bus Interface Card

Dual-port Isolated CAN Interface Module

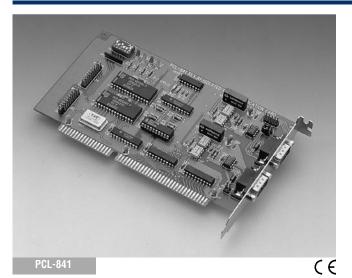

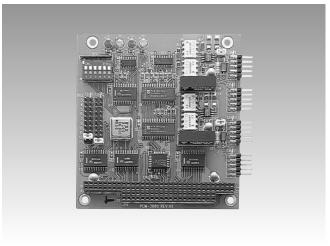

Features

- · Operates two separate CAN networks at the same time
- High speed transmission up to 500 kbps
- 16 MHz CAN controller frequency
- Takes 4 KB of address space, 40 base address adjustable in steps from C800H to
- Optical isolation protection of 1000 V_{DC} ensures system reliability
- Wide IRQ selection for each port: IRQ 3, 4, 5, 6, 7, 9, 10, 11, 12, 15
- LEDs indicate Transmit/Receive status on each port
- Direct memory mapping enables very fast access to the CAN controllers
- Windows® DLL library and examples included
- Supports Windows® 95/98/2000/XP driver and utility

Features

PCM-3680

- · Operates two separate CAN networks at the same time
- High speed transmission up to 500 kbps
- Direct memory mapping enables very fast access to the CAN controllers
- Windows® DLL library and examples included
- Supports Windows® 95/98/2000/XP driver and utility

Specifications

Ports CAN Controller SJA-1000

 CAN Transceiver 82C250 Signal Support CAN_H, CAN_L From C800H to EF00H

Memory Segment Base Address

IRQ 3, 4, 5, 6, 7, 9, 10, 11, 12 or 15

Isolation Voltage

+5 V @ 400 mA typical, 950 mA max. Power Consumption

Connectors Dual DB-9 male connectors • Operating Temperature $0 \sim 50^{\circ} \text{ C} (32 \sim 122^{\circ} \text{ F})$

185 x 100 mm (7.3" x 3.9") (PCL-841) Dimensions

- Shipping Weight 0.6 kg (1.3 lb)

Specifications

Ports

CAN Controller SJA-1000 CAN Transceiver 82C250 Signal Support CAN_H, CAN_L

Memory Segment From C800H to EFOOI **Base Address**

IRQ 3, 4, 5, 6, 7, 9, 10, 11, 12 or 15

1000 V_{DC} **Isolation Voltage** +5 V @ 400 mA Power Consumption

Connectors Two DB-9 male connectors (cable included)

• Operating Temperature $0 \sim 65^{\circ} \text{ C} (32 \sim 122^{\circ} \text{ F})$ Dimensions 90 x 96 mm (3.6" x 3.8")

Ordering Information

PCL-841-A

Dual-port Isolated CAN-bus Interface Card

Ordering Information

PCM-3680-A

Dual-port Isolated CAN Interface Module

 (ϵ)